

# PERFORANO BENCH

OSCAR TUSQUETS &  
LLUÍS CLOTET  
1996

**bd**

## COMPONENTS, MATERIALS and FINISHES:

**SEAT** with steel tubular chassis of Ø18x2mm, recovered with a perforated steel sheet of 2mm thickness  
Steel tubular legs and perforated steel sheets for seating, covered in cataphoresis and painted with polyester resin in silver grey (RAL9006) microtexturized.

Seat in modules of 1'23m length.

**LEGS** in hot-galvanized steel tubular in diferents diameters;  
To HANG (Ø28x2mm)

To BUILD IN -Simple or Double- (Ø28x2mm)

To FREE-STANDING (OR TO BE SCREWED) -Simple or Double- (Ø25x2mm)

Stainless steel **SCREWS**.

The wall **SECURING SCREWS** -bench to hang- and to the floor -freestanding bench-, are not supplied by BD.

**ARMS** in painted steel fixed by screws (optional).

## DIMENSIONS and WEIGHTS:

### PERFORANO BENCH

-Bench to hang: 1230 x 760 x H.900mm

The placement of the screws for assembling to the wall: Ø8'5mm

-Simple bench to build in: 1230 x 755 x H.900mm

-Double bench to build in: 1230 x 1523 x H.900mm

-Free-standing simple bench: 1230 x 755 x H.900mm

-Free-standing double bench: 1230 x 1523 x H.900mm

The placement of the screws for assembling to the floor: Ø12mm

### PARTS

-Seat: 20Kg

-Leg to hang: 2'5 Kg

-Simple leg to build in: 3Kg

-Double leg to build in: 3'5Kg

-Free-standing simple leg: 2'5Kg

-Free-standing double leg: 4Kg


## PACKAGING:

The benches will be supplied unassembled.


## CLEANING & MAINTENANCE

The bench should be cleaned with a damp cloth or a mild soap, recommended to use green baize. Do not use cleaning products with alcohols and solvents or their derivatives.


### BENCH TO HANG

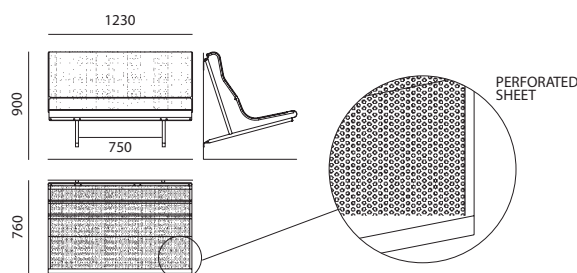


### BENCH TO BUILD IN

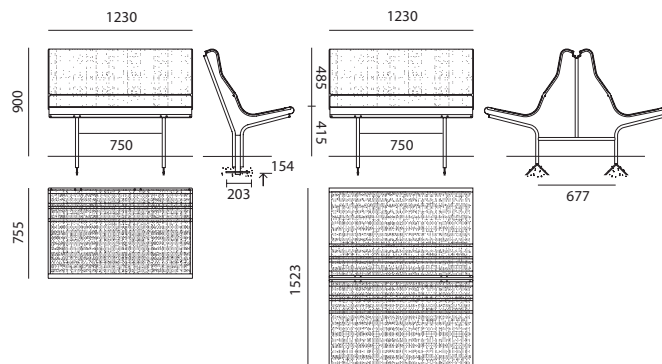

### FREE-STANDING (OR TO BE SCREWED)

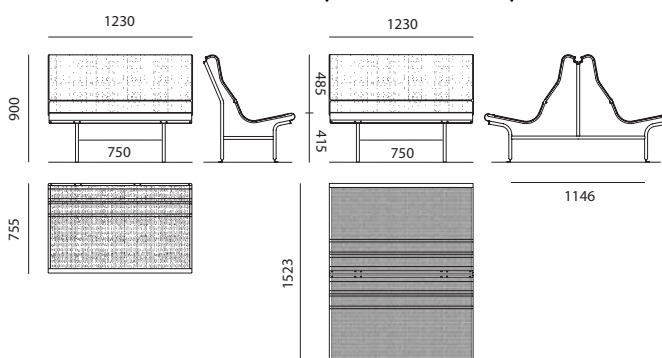

### PERFORANO BENCH CONTINUOUSLY

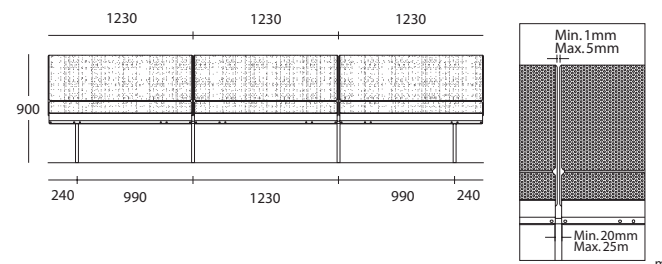

MEASUREMENTS IN MM

## BD BARCELONA

RAMÓN TURRÓ 126, 08005 BARCELONA (SPAIN)

(+34) 934 686 909

BD@BDBARCELONA.COM

BDBARCELONA.COM

